


SEE STANDARD CG-7 FOR DETAILS AND NOTES ON REMOVAL OF EXISTING CURB.

A ←
PLAN


* ENTRANCES 10' WIDE SHALL HAVE A 9' FLARE WIDTH AT EDGE OF PAVEMENT. ENTRANCE WIDTHS GREATER THAN 10' SHALL HAVE TAPER WIDTH ADJUSTED SYMMETRICALLY (FLARES ON BOTH SIDES EQUAL) TO THE MAXIMUM 28' WIDTH AT EDGE OF PAVEMENT.

PRIVATE ENTRANCE WIDTH MEASURED AT R/W LINE
10' MINIMUM
20' MAXIMUM

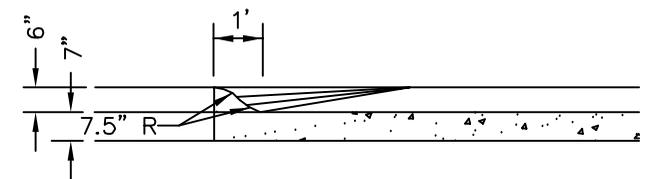

SECTION ELEVATION AT GUTTER LINE

FOR USE ON STREETS HAVING ≥ 40 MPH SPEED LIMIT OR ≥ 10,000 V.P.D. TRAFFIC VOLUME.

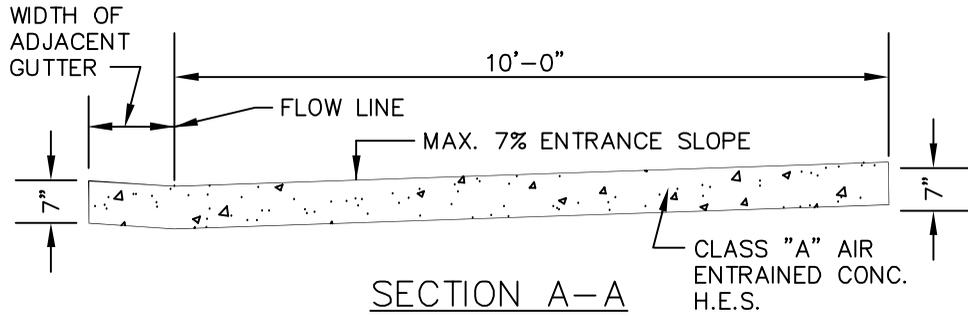

SECTION A-A

		DESIGN AND CONSTRUCTION STANDARDS	
		HIGH TRAFFIC VOLUME RESIDENTIAL ENTRANCE WITH CURB & GUTTER	
08/01/03	REV. FOR INTERNET 2003	DR. BY:	DATE:
DATE	REVISIONS	CHK. BY:	DATE:
		APP. BY:	DATE:
			CG-7B