


R=40' RADIUS MIN. EXCEPT 25' RADIUS MIN. WHERE MINOR STREETS INTERSECT.

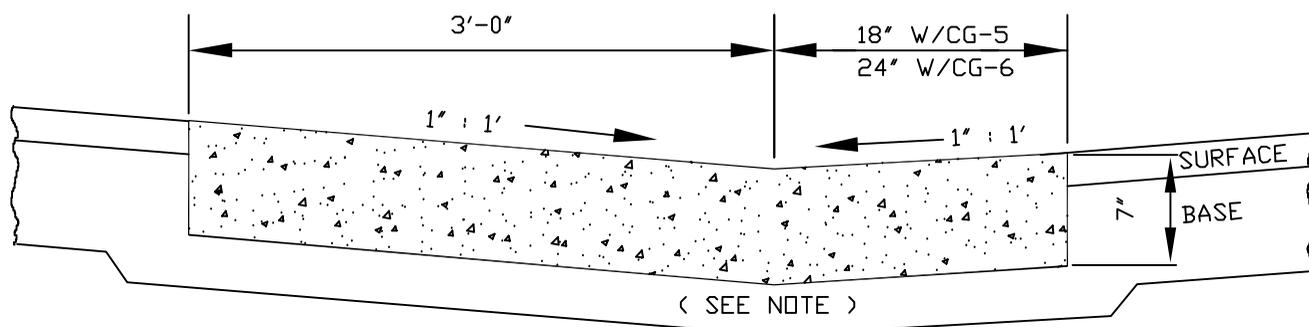

SECTION A-A

NOTE:  
WHEN PAVEMENT DESIGN CBR IS LESS THAN 4, BASE COURSE OR SOIL CEMENT TO EXTEND BENEATH CG-8 AT A MINIMUM DEPTH OF 4" UNDER ENTIRE VALLEY GUTTER.

USE OF VALLEY GUTTERS RESTRICTED PER CITY POLICY.

 DEPARTMENT OF PUBLIC WORKS ENGINEERING		DESIGN AND CONSTRUCTION STANDARDS	
		<b>VALLEY GUTTER</b>	
08/01/03	REV. FOR INTERNET 2003	DR. BY:	DATE:
DATE	REVISIONS	CHK. BY:	DATE:
		APP. BY:	DATE:
			<b>CG-8</b>

APPROVED FOR THE WEB \_\_\_\_\_  
City Engineer \_\_\_\_\_  
Date \_\_\_\_\_