





DETAIL 1

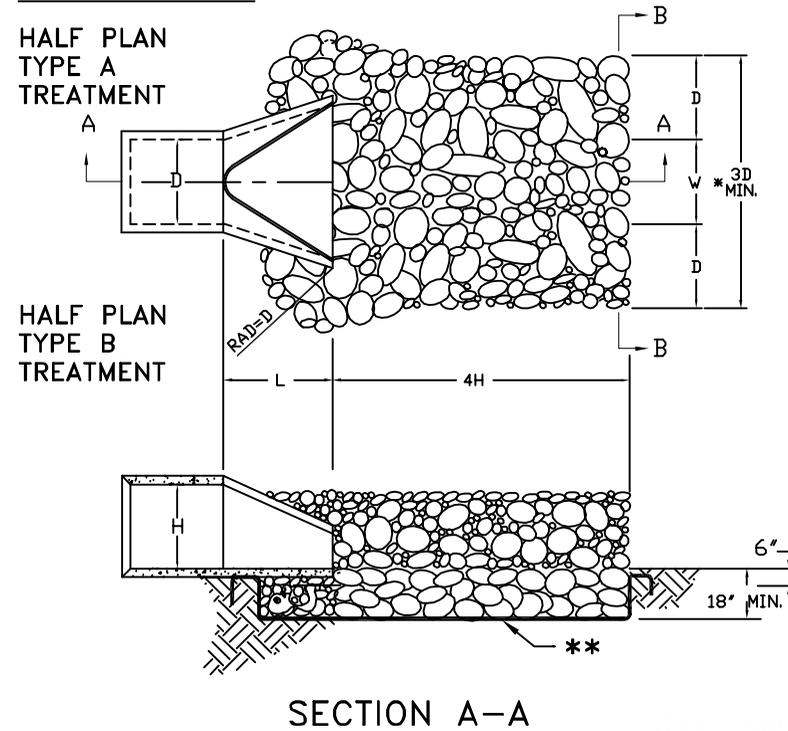

DETAIL 2

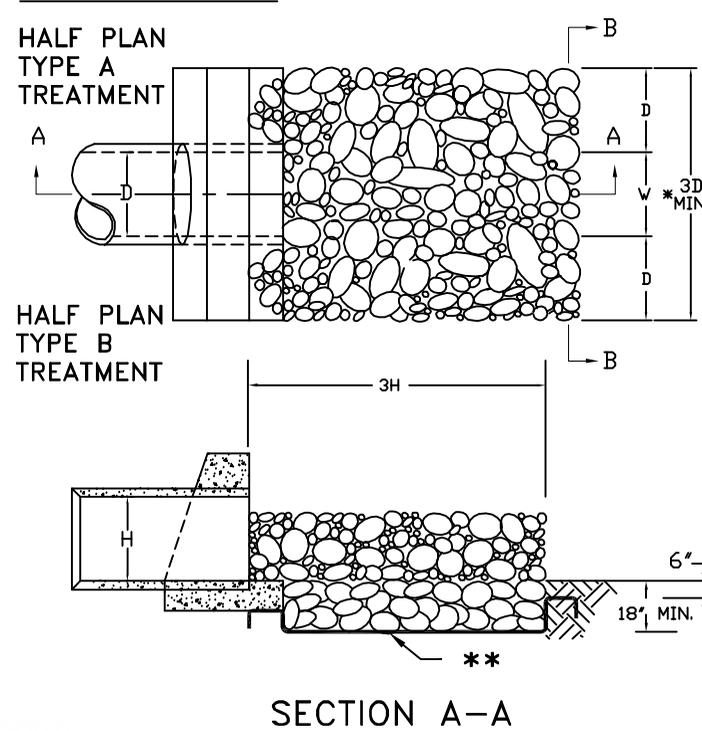

DETAIL 3

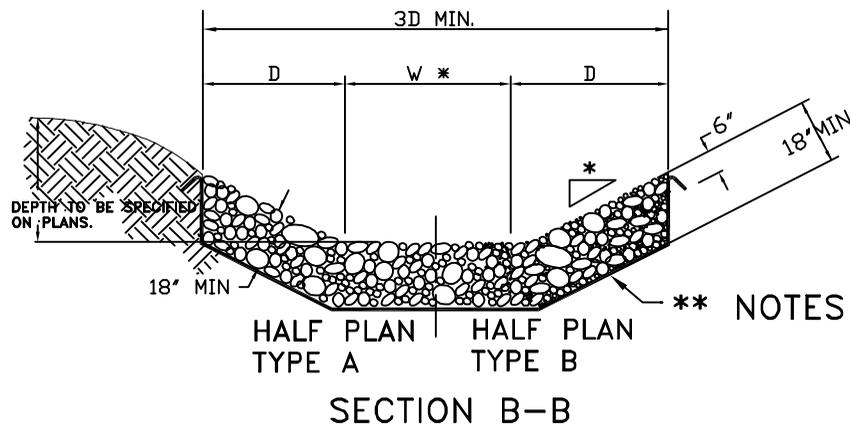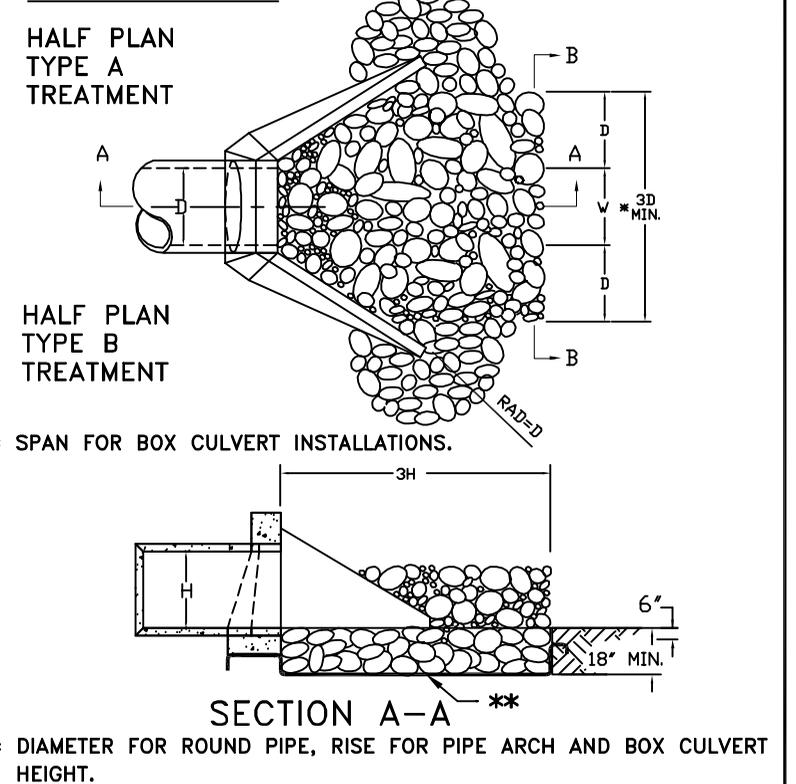

NOTES:

FOR MULTIPLE LINE INSTALLATIONS DIMENSION D IS TO GOVERN THE PROTECTION OUTSIDE THE CHANNEL WIDTH (W).
ON ANY SECONDARY ROADS INSTALLATION REQUIRING EROSION CONTROL TREATMENT WHERE NO ENDWALL OR ENDSECTION IS SPECIFIED ON PLANS, CONSTRUCTION IS TO BE IN ACCORDANCE WITH DETAIL 2 SHOWN ABOVE.

TYPE A OR B TREATMENT TO BE AS SPECIFIED ON THE PLANS.

TYPE B THE TOP 6" OF THE STONE SHALL BE GROUTED IN ACCORDANCE WITH VDOT SPECIFICATION SECTION 418.09, EXCEPT THAT THE PORTION BELOW THE TOP 6" MAY BE CHOKED WITH FINE MATERIAL.

** NONWOVEN GEOTEXTILE FILTER FABRIC PER DIVISION 30 OF PFM VOL. III.

* USE TYPICAL SECTION SHOWN ON PLANS OR NORMAL SIDE SLOPE, BOTTOM WIDTH, AND DEPTH OF CHANNEL, DITCH OR NATURAL GROUND.

		DESIGN AND CONSTRUCTION STANDARDS	
		EROSION CONTROL WITH STONE	
08/01/03	REV. FOR INTERNET 2003	DR. BY:	DATE:
DATE	REVISIONS	CHK. BY:	DATE:
		APP. BY:	DATE:

ECS-1