



ISOMETRIC VIEW SHOWING EXIST. CURB REMOVAL

PRIVATE ENTRANCE WIDTH - 10' MINIMUM
20' MAXIMUM

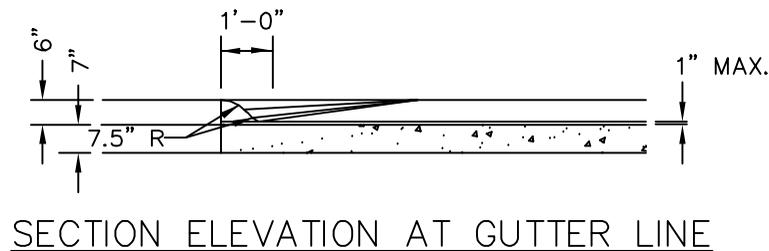

ALTERNATE CURB REMOVAL

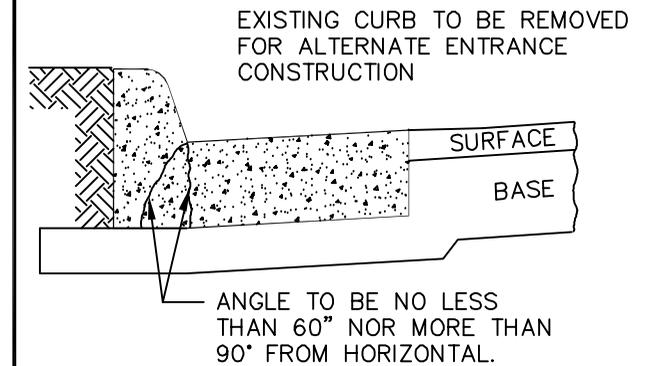

CONSTRUCTION NOTES:

CURB TO BE SAW CUT AT EACH END.

FACE OF BREAK AND CURB CUT TO BE COATED WITH BONDING COMPOUND IN ACCORDANCE WITH VDOT SPECIFICATIONS, SECTION 243.

THIS METHOD OF CONSTRUCTION WILL BE ALLOWED AS AN ALTERNATE IN AREAS WHERE CURB AND GUTTER WAS PREVIOUSLY INSTALLED, EXCEPT WHERE AN EXPANSION JOINT IS INSTALLED WITHIN THE LIMITS OF THE PROPOSED ENTRANCE OR IN CASE OF FAULTY WORKMANSHIP. IN THIS INSTANCE, COMPLETE REMOVAL OF THE CURB AND GUTTER, AS SHOWN HEREON, WILL BE REQUIRED.

Chesapeake
VIRGINIA

DESIGN AND CONSTRUCTION STANDARDS
RESIDENTIAL ENTRANCE FOR
STREETS WITH CURB & GUTTER

08/01/03	REV. FOR INTERNET 2003	DR. BY:	DATE:
		CHK. BY:	DATE:
		APP. BY:	DATE:

CG-7

08