


Chesapeake modifications to Regional Standards Third Edition

1. An 8" gap shall be provided between the main and the bottom of the riser pipe.
2. Two bricks are to be placed under the riser pipe for the valve to provide support.
3. Replace the #57 stone with sand.
4. A two inch corporation stop shall be used to make the connection to the pipe.
5. Replace the #57 stone under the valve box frame with #26A stone.
6. The air vent pipe shall be set plumb.
7. All ductile iron mains and PVC mains 6" and larger must be tapped without a tapping saddle. Tapping saddles are required for taps on 4" PVC mains and must conform to the specifications

WS_03.tif

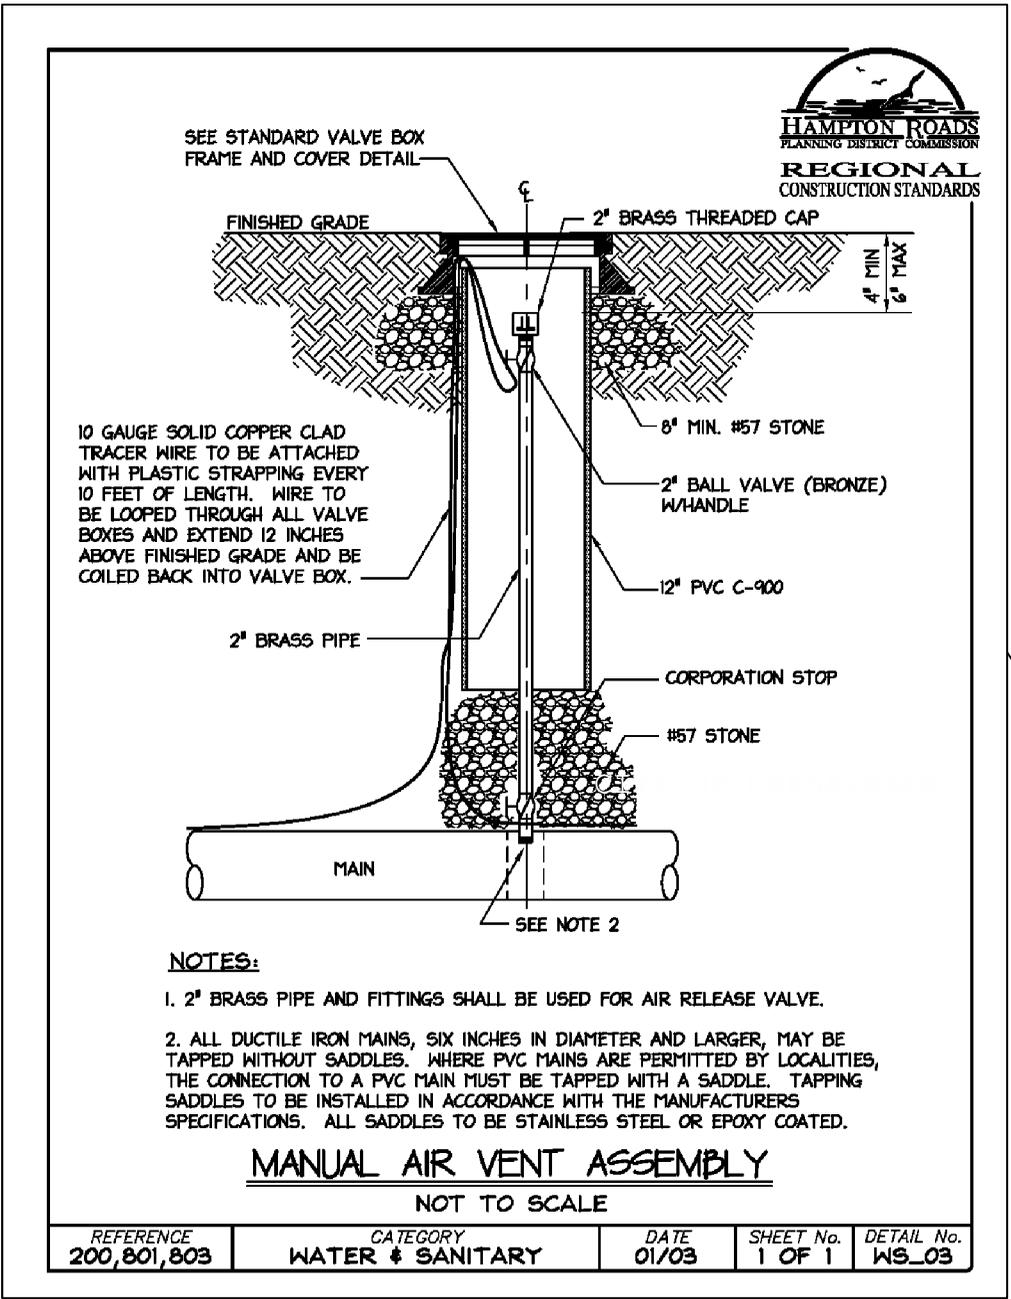

**Regional Construction
Standards
Third Edition**



DESIGN AND CONSTRUCTION STANDARDS
MANUAL AIR VENT ASSEMBLY

08/15/03	REV. FOR INTERNET 2003	DR. BY:	DATE:
DATE	REVISIONS	CHK. BY:	DATE:
		APP. BY:	DATE:

WS_03

04

APPROVED FOR THE WEB

Utility Engineer

Date