


Chesapeake modifications to Regional Standards Third Edition  
*Not used in Chesapeake except with the approval of the Utility Engineer*

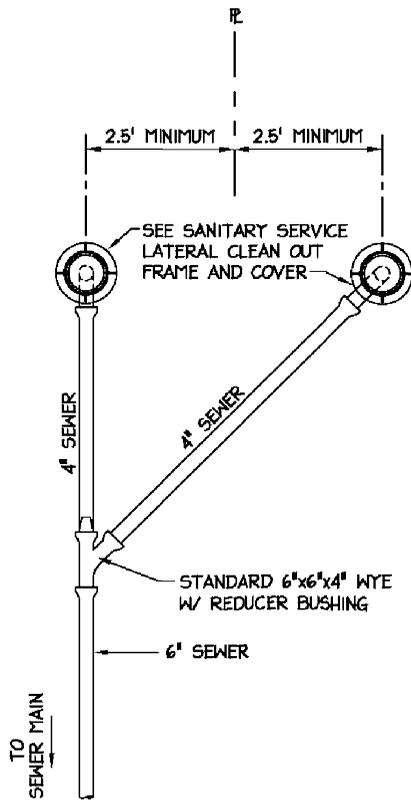

**NOTES:**

1. DUAL SERVICE CONNECTION TO BE USED ONLY WHERE APPROVED BY THE LOCALITY.
2. LATERAL PIPE SHALL BE PVC, ASTM D-3034, SDR 26, UNLESS DUE TO SPECIAL CIRCUMSTANCES THE LOCALITY REQUIRES THE PIPE TO BE DUCTILE IRON OR PVC C-900.
3. SEE PLANS FOR LOCATION OF CLEAN OUT.
4. REFER TO SANITARY SEWER SERVICE CONNECTION DETAIL FOR VERTICAL PROFILE.

**DUAL SANITARY SEWER SERVICE CONNECTIONS**

NOT TO SCALE

REFERENCE 200,802	CATEGORY SANITARY SYSTEMS	DATE 01/03	SHEET No. 1 OF 1	DETAIL No. SS_15
----------------------	------------------------------	---------------	---------------------	---------------------

**Regional Construction  
Standards  
Third Edition**

		DESIGN AND CONSTRUCTION STANDARDS			
		<b>DUAL SANITARY SEWER  SERVICE CONNECTION</b>			
DR. BY:	DATE:	<b>SS_15</b>	16		
08/15/03	REV. FOR INTERNET 2003			CHK. BY:	DATE:
DATE	REVISIONS			APP. BY:	DATE:

APPROVED FOR THE WEB

Utility Engineer

Date