


ISOMETRIC VIEW
SHOWING EXIST. CURB REMOVAL

ALTERNATE CURB REMOVAL

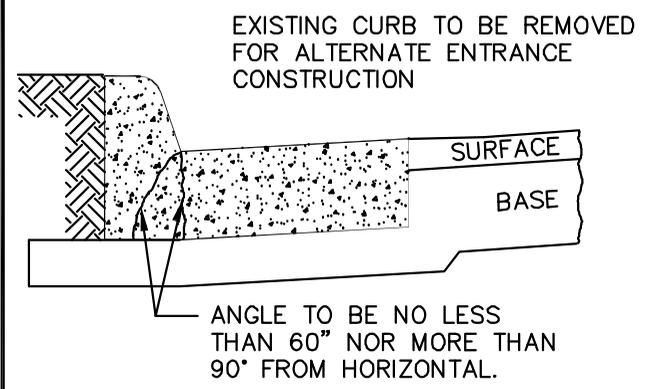


CONSTRUCTION NOTES:

CURB TO BE SAW CUT AT EACH END.

FACE OF BREAK AND CURB CUT TO BE COATED WITH BONDING COMPOUND IN ACCORDANCE WITH VDOT SPECIFICATIONS, SECTION 243.

THIS METHOD OF CONSTRUCTION WILL BE ALLOWED AS AN ALTERNATE IN AREAS WHERE CURB AND GUTTER WAS PREVIOUSLY INSTALLED, EXCEPT WHERE AN EXPANSION JOINT IS INSTALLED WITHIN THE LIMITS OF THE PROPOSED ENTRANCE OR IN CASE OF FAULTY WORKMANSHIP. IN THIS INSTANCE, COMPLETE REMOVAL OF THE CURB AND GUTTER, AS SHOWN HEREON, WILL BE REQUIRED.

PRIVATE ENTRANCE WIDTH - 10' MINIMUM
20' MAXIMUM

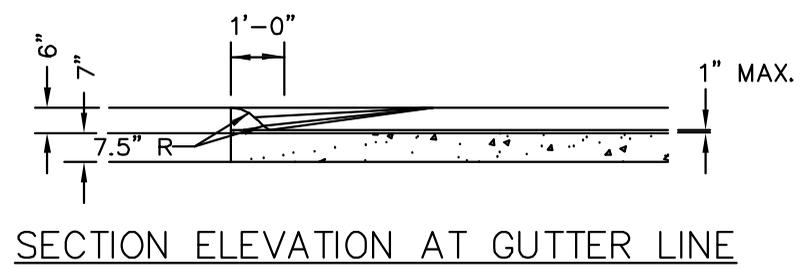

DESIGN AND CONSTRUCTION STANDARDS

RESIDENTIAL ENTRANCE WITH PAVERS
FOR
STREETS WITH CURB & GUTTER

DATE	REVISIONS	DR. BY:	DATE:	CG-7D
		CHK. BY:	DATE:	
		APP. BY:	DATE:	