


FLARE SHALL NOT EXTEND BEYOND LIMITS OF PROPERTY.

EDGE OF EXIST. PAVEMENT

ALLOWABLE SURFACES:
 2" - ASPHALT / 6" 21A OR B AGGREGATE OR
 7" - CLASS A-3 CONCRETE

IN RURAL OVERLAY AREAS < 40MPH:
 6" 21A OR 21B AGGREGATE

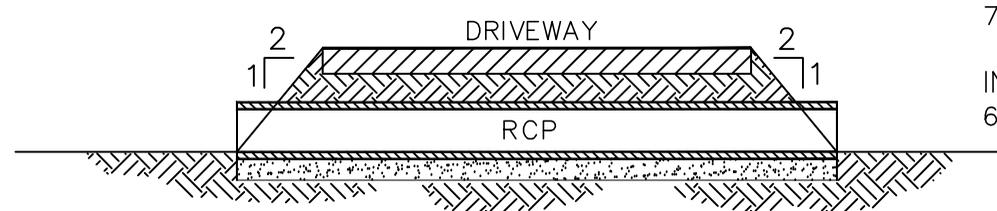


SECTION B-B

RESIDENTIAL ENTRANCE
 NOT TO SCALE

NOTES:

1. PIPE SIZE TO BE DETERMINED BY CITY, IF NO PLAN IS REQUIRED.
2. MINIMUM 24 L.F. - 15" R.C.P. CLASS III REQUIRED
3. DITCH TO BE CLEANED AND REGRADED
4. ALL JOINTS TO BE WRAPPED WITH NON-WOVEN FILTER FABRIC.
5. ALL STONE TO BE #21A OR 21B

ROUND PIPE	ELLIPTICAL PIPE
18"	14" X 23"
24"	19" X 30"
27"	22" X 34"
30"	24" X 38"
36"	29" X 45"

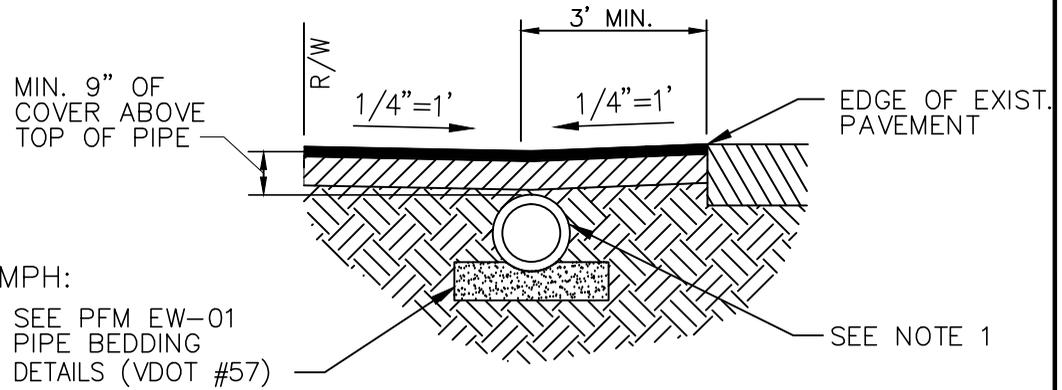

SECTION A-A

		DESIGN AND CONSTRUCTION STANDARDS	
		RESIDENTIAL ENTRANCE FOR STREETS WITHOUT CURB & GUTTER	
09/20/18	STANDARD UPDATED	DRW.BY: RNW	DATE: 12/2009
01/15/10	REVIEWED PFM 2010 EDITION FOR WEB	CHK.BY: ALH	DATE: 12/2009
DATE	REVISIONS	APPV.BY: TDC	DATE: 12/2009

CG-7A