

PAVEMENT PATCH SECTION

SURFACE TREATED STREETS


3" SM-2A
4" AGGREGATE BASE STONE
COMPACTED SUBGRADE

CONCRETE STREETS

PAVEMENT SURFACE, BASE, AND SUBBASE ARE TO MATCH EXISTING

PRIMARY AND SECONDARY ASPHALT STREETS

- | | |
|--|--|
| <p>(1) A.D.T. UP TO 1000
1.5" SM-2A
4" BM-2
6" AGGREGATE BASE STONE
COMPACTED SUBGRADE</p> | <p>(3) A.D.T. UP TO 5000
1.5" SM-2A
6" BM-2
9" AGGREGATE BASE STONE
COMPACTED SUBGRADE</p> |
| <p>(2) A.D.T. UP TO 2500
1.5" SM-2A
5" BM-2
8" AGGREGATE BASE STONE
COMPACTED SUBGRADE</p> | <p>(4) A.D.T. OVER 5000
MUST BE DESIGNED AND
SUBMITTED FOR APPROVAL
BY PUBLIC WORKS
DEPARTMENT</p> |

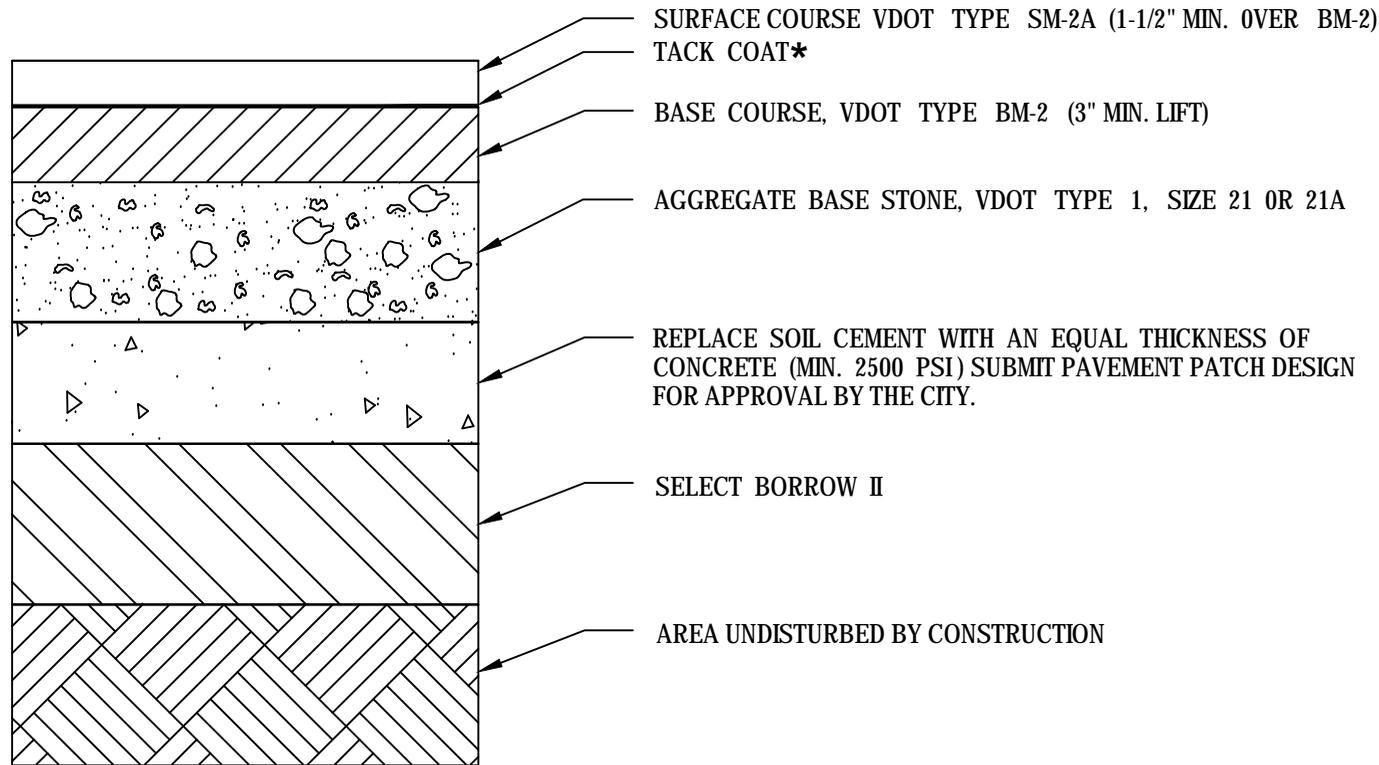

TYPICAL ASPHALT PAVEMENT

PATCH SECTION

N.T.S.

THE THICKNESS ABOVE FOR EACH MATERIAL IS ILLUSTRATIVE ONLY. APPLICABLE MATERIAL AND THICKNESS SHALL BE IN ACCORDANCE WITH THE APPROVED PAVEMENT PATCH SECTION. (SEE PAVEMENT PATCH SECTION)

* AS REQUIRED BY CURRENT VDOT ROAD AND BRIDGE SPECS. JULY 2016 SECTION
310 - TACK COAT AND SECTION 311 - PRIME COAT.

Sheet 1 of 3

		DESIGN AND CONSTRUCTION STANDARDS	
		PAVEMENT CUT DETAIL (TYP. ASPHALT PAVEMENT PATCH SEC.)	
12/05/06	LEADER FROM NOTE CHANGED	DR. BY: RW	DATE: 12/05/06
08/01/03	REV. FOR INTERNET 2003	CHK. BY: TDC	DATE: 12/05/06
DATE	REVISIONS	APP. BY: EJM	DATE:

PC-1

01