


Chesapeake modifications to Regional Standards Third Edition

1. Delete note 1.
2. Two bricks are to be placed under the riser for the valve to provide support.
3. Remove stone bedding from around valve and replace with sand.
4. Replace the #57 stone under the valve box frame with #26A stone.
5. The riser pipe shall be centered over the valve nut and installed perpendicular to the pipeline.
6. All valves are to be set so that the valve stem is plumb.

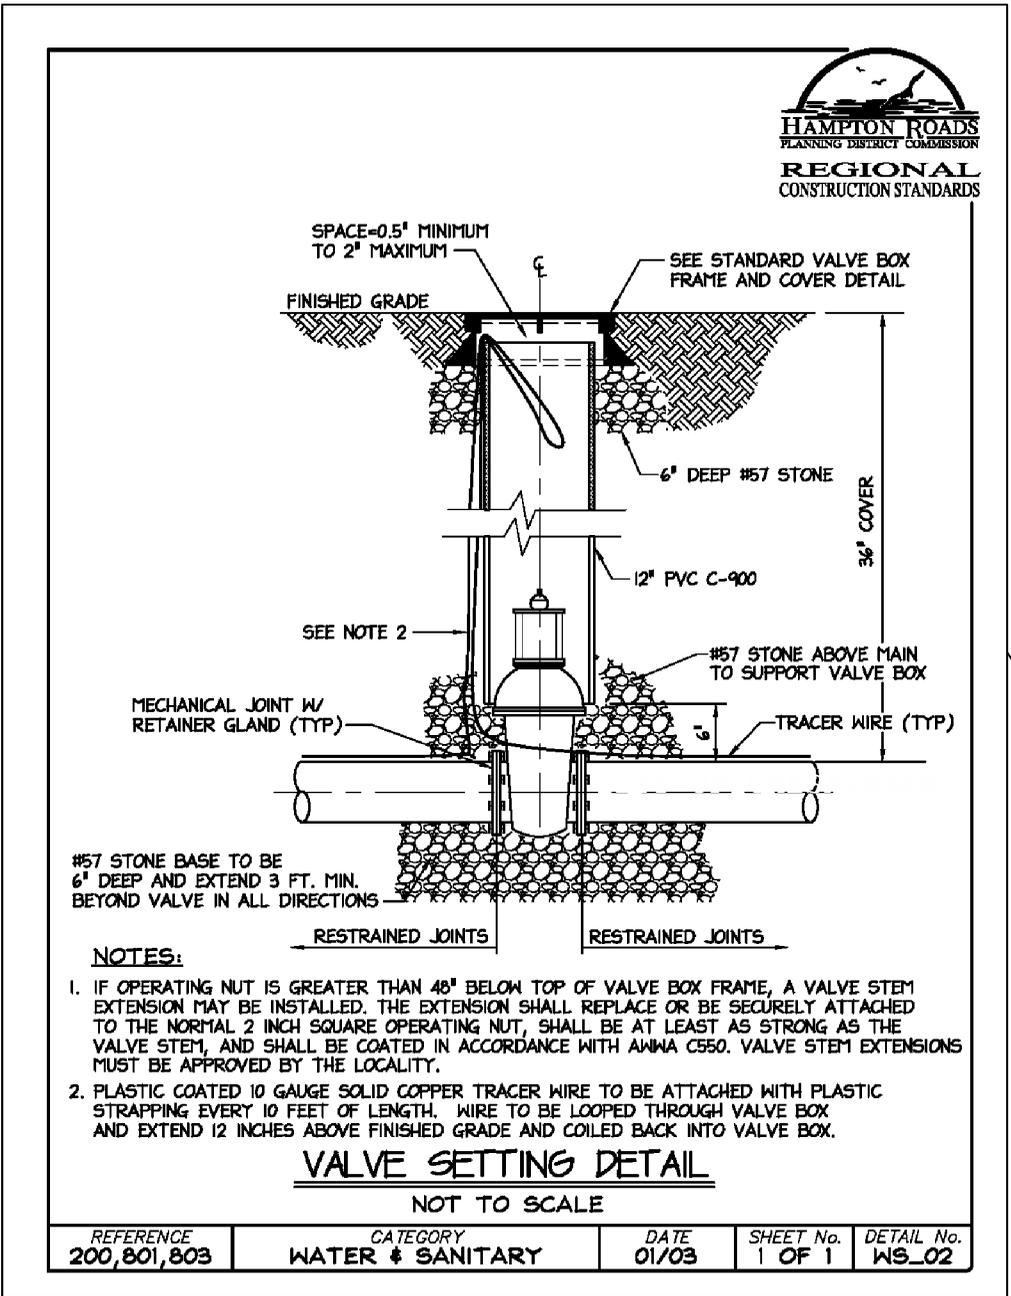

WS_02.tif

**Regional Construction
 Standards
 Third Edition**



DESIGN AND CONSTRUCTION STANDARDS

VALVE SETTING DETAIL

		DR. BY:	DATE:	WS_02
08/15/03	REV. FOR INTERNET 2003	CHK. BY:	DATE:	
DATE	REVISIONS	APP. BY:	DATE:	

APPROVED FOR THE WEB _____

Utility Engineer

_____/_____/_____
Date