

July 19, 2021

Dear Resident:

The City of Chesapeake Department of Public Utilities is currently in the design phase of our South Central Water Main Project. This project consists of the design and construction of a 36-inch diameter water transmission main, an HRSD 24-inch force main, and a City 12-inch force main on West Road from Dominion Boulevard south to the Chesapeake Regional Airport. In addition, new water main connections on Number Ten Lane and Drumcastle Lane will be included in this project. The limits of the project area are shown on the back of this letter.

Before design of the new systems begin, it is necessary to perform a survey of the area in order to determine where the existing buried utilities are located so that a set of construction drawings can be developed. Over the next several months, you will observe three separate work crews in your area. The survey crew (Precision Measurements Inc.) will be taking measurements of the existing system and above ground features such as utility poles, trees, curbs and manholes. The utility marking crew (Accumark) will locate existing underground utilities with a variety of paint colors or short colored flags. The soil testing crew (GET) will operate drilling equipment within the roadways in order to determine the pavement thickness and subsurface soil conditions. Your water and sewer service will not be affected during this survey and design work.


This work will take place from July to December 2021. Working hours will generally be Monday through Friday, between 8am and 5pm.

We ask for your patience during the design phase of this project. Should you have any questions, please contact me at (757) 382-6019 or our consulting engineer, Mr. Scott Morrow with Hazen & Sawyer at (757) 803-5027.

Sincerely,

Arnes L. Cuevas

Arnes L. Cuevas
Project Manager

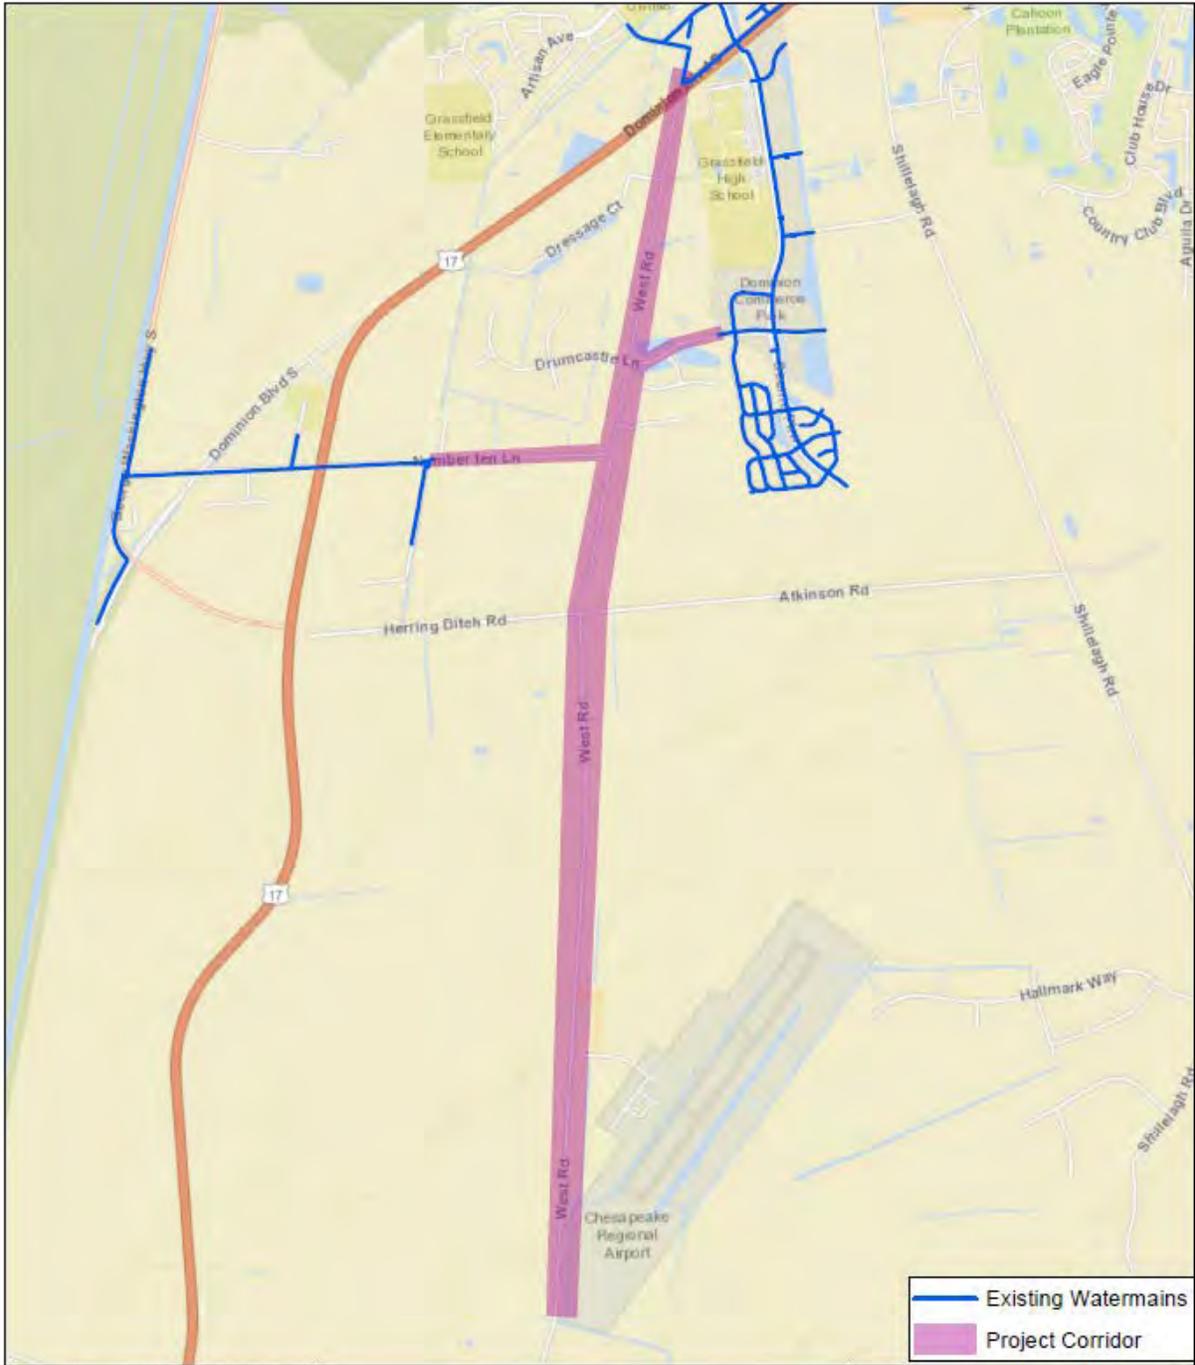

Existing Watermains
Project Corridor



**South Central Water Transmission
Main & Loop - Phase 1
Project Limits**

